Technical Data Sheet

OPTI-MAX™ Performance powder 0220-40D

Product description

Opti-Max™ Performance powder 0220-40D is a specialty polymer powder with high transparency and cold temperature flexibility, designed for soft PVC replacement in film applications and for masterbatch production.

Physical properties	Typical Value[1] (SI)	Test
Density	0.88 g/cm^3	ASTM D1505
Appearance	Powder	
Top cut	1000 µm	
Bulk density	0.33 g/cm^3	ASTM D1895
Pourability	29 g/sec	ASTM D1895

Thermal	Typical Value (SI)	Test
Vicat Softening Temperature	77°C	Internal test method

[1] Values listed here are typical averages and should not be taken as our Product Specification

Particle size distribution graph

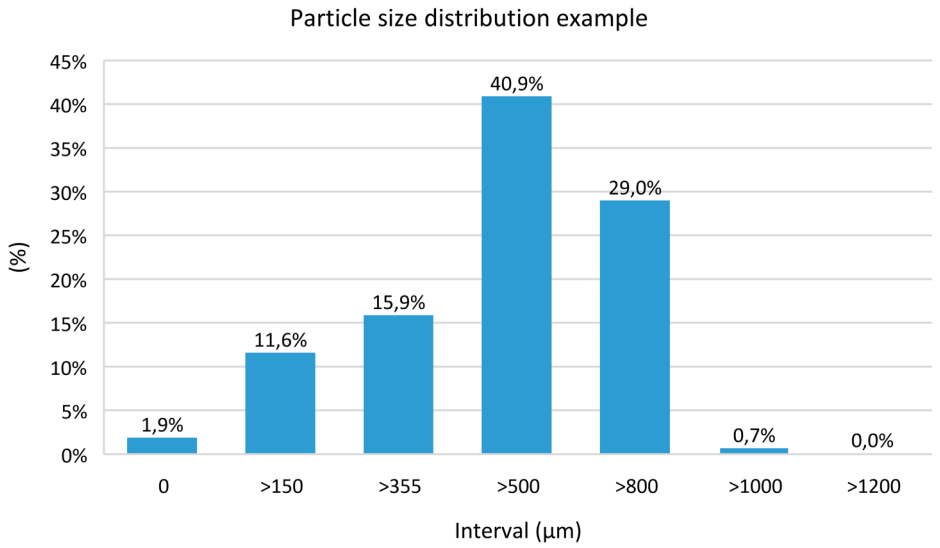

Contact information

Customized Compound Solutions A/S
Søholm Park 1
2900 Hellerup, Denmark

ccs-customerservice@bjorn-thorsen.com
www.ccs-nordic.com

DISCLAIMER AND LIMITATION OF LIABILITY

The information contained in this data sheet has been developed through the application of accepted laboratory practice and is believed to be reliable. Since the conditions of the application and use of our products are beyond our control, no warranty or representation is expressed or implied regarding accuracy of the information, the results to be obtained from the use of the product, or that such use will not infringe on any patents. This information is furnished with the express conditions that the user will evaluate it through testing and determine the suitability of the product. Customized Compound Solutions will not be liable for any injury or damage arising from the application of this information. Customized Compound Solutions' warranty is set forth in its standard terms and conditions of sale and is limited to the product replacement or purchase price refund.

CUSTOMIZED COMPOUND SOLUTIONS DISCLAIMS ANY WARRANTY OR MERCHANTABILITY OF WARRANTY OF FITNESS FOR A PARTICULAR USE.

9 September 2020